




Product Features

- Certified to EN 1433 Load Class C- 56,000 lbs - 968 psi
- Supplied with a quantity of two (½ -13 x 1¾") socket head bolts to lock down grate
- Manufactured from 0.197" (5mm) thick galvanized steel bars
- Bicycle Tire Penetration Resistant to AS3996-2006

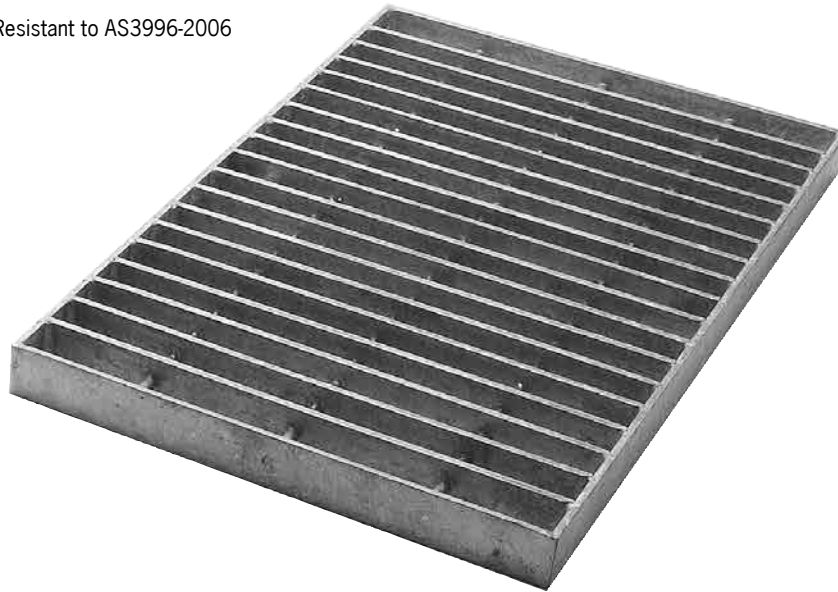

Specifications

General

The surface drainage system shall be ACO Drain F660 catch basin* galvanized steel bar grate with bolt locking as manufactured by ACO Polymer Products, Inc. or similar approved.

Materials

The covers shall be manufactured from galvanized steel and have **minimum** properties as follows:

- **Independently certified to meet Load Class C to EN 1433 - 56,000 lbs - 968 psi**
- **Intake area of 267 sq. in. (1,722.5 cm²) per 24" grate**

The overall width of 14.75" (375mm) and overall length of 24" (610mm) for part number 97443. Slots measure 3.3" (84mm) by 1.0" (25mm) and 3.0" (76mm) by 1.0" (25mm).

Installation

The trench drain system and grates shall be installed in accordance with the manufacturer's installation instructions and recommendations.



* delete as appropriate

ACO DRAIN

F660 Bar galvanized steel grate



ACO Specification Information

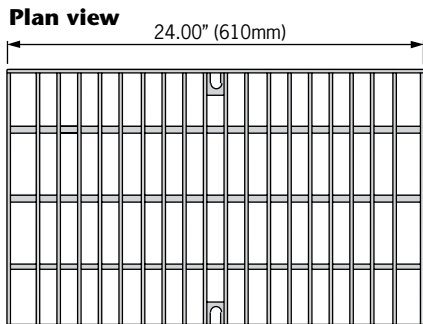

Description	Part No.	Length inches (mm)	Width inches (mm)	Weight lbs.
F660 Galvanized steel bar grate	97443	24.00 (610)	14.75" (375)	35.2
Replacement galvanized steel socket head bolts (Qty 2)	93895	-	-	0.4

ACO Polymer Products, Inc.

East Sales Office

P.O. Box 245
 Chardon, OH 44024
 Tel: (440) 285-7000
 Toll free: (800) 543-4764
 Fax: (440) 285-7005

West Sales Office

P.O. Box 12067
 Casa Grande, AZ 85230
 Tel: (520) 421-9988
 Toll Free: (888) 490-9552
 Fax: (520) 421-9899

Electronic Contact:

info@acousa.com
 www.acousa.com

