




H100-8

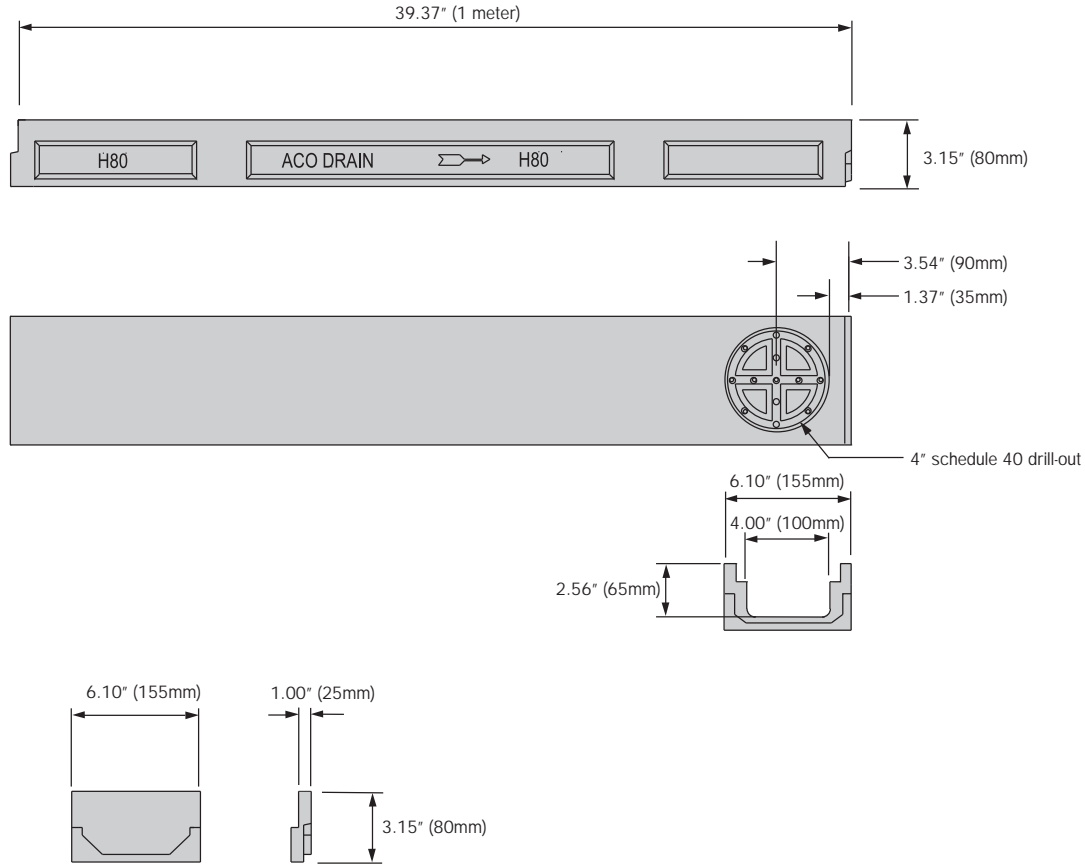

Outlet flow rates

| Product        | Outlet size (Sch. 40) | Invert Depth | GPM | CFS  |
|----------------|-----------------------|--------------|-----|------|
| H100-8 channel | 4" round              | 2.56         | 87  | 0.20 |

Note: These are the pipe flow rates at the specified outlet, NOT channel flow rates.

ACO Specification Information

# ACO DRAIN

## SlabDrain - H100-8 channel system



ACO Specification Information

| Description  | Part No. | Invert Depth |    | Weight lbs. |
|--|----------|--------------|----|-------------|
|  |          | inches       | mm |             |
| <b>H100-8 - Polyester polymer concrete</b><br>H100-8 Neutral channel - 39.37" (1m) | 00985    | 2.56         | 65 | 20.0        |
| H100-8 Polymer concrete closing cap  | 05935    | 2.56         | 65 | 1.0         |

**Notes:**

1. Add nominal 0.6" (15mm) to invert depth for overall channel depth
2. Preformed Sch. 40 4" dia. drill-out cast on underside of each channel
3. Use QuickLok/PowerLok grate removal tool to remove grates (Part # 01318)

### Specifications

**General**

The surface drainage system shall be ACO Drain H100-8 complete with gratings secured with 'QuickLok' as manufactured by ACO Polymer Products, Inc. or equal approved.

**Materials**

The trench system bodies shall be manufactured from polyester polymer concrete with minimum properties as follows:

Compressive strength: 14,000 psi  
Flexural strength: 4,000 psi  
Water absorption 0.07%  
Frost proof  
Salt proof  
Dilute acid and alkali resistant

The nominal clear opening shall be 4.00" (100mm) with overall width of 6.10" (155mm). Pre-cast units shall be manufactured with neutral invert and have a wall thickness of at least 0.50" (13mm). Each unit will feature a male to female interconnecting end profile. Units shall have horizontal cast in anchoring features on the outside wall to ensure maximum mechanical bond to the surrounding bedding material and pavement surface.

**Grates**

Grates should be specified. See separate ACO Spec Info grate sheets for details. After removal of grates and 'QuickLok' bar there shall be uninterrupted access to the trench to aid maintenance.

**Installation**

The trench drain system shall be installed in accordance with the manufacturer's installation instructions and recommendations.

**ACO Polymer Products, Inc.**

**Northeast Sales Office**

P.O. Box 245  
Chardon, OH 44024  
Tel: (440) 285-7000  
Toll free: (800) 543-4764  
Fax: (440) 285-7005

**West Sales Office**

P.O. Box 12067  
Casa Grande, AZ 85130  
Tel: (520) 421-9988  
Toll Free: (888) 490-9552  
Fax: (520) 421-9899

**Southeast Sales Office**

4211 Pleasant Road  
Fort Mill, SC 29708  
Toll free: (800) 543-4764  
Fax: (803) 802-1063

**Follow us on**



**Electronic Contact:**

info@ACODrain.us  
www.ACODrain.us



© February 13, 2013 ACO Polymer Products, Inc. This information is believed to be accurate but it is not guaranteed to be so. We cannot assume liability for results that buyer obtains with our product since conditions of use are beyond the control of the company. It is the customer's responsibility to evaluate suitability and safety of product for his own use. ACO Polymer Products Inc. reserves the right to change the product and specifications without notice.