




Product Features

- Certified to EN 1433 Load Class A - 3,500 lbs - 91 psi
- Grates do not lock down
- Suitable for use with K50
- Manufactured from 14 gage galvanized steel
- Complies with ADA - American Disabilities Act of 1990 Section 4.5.4
- Complies with ASME: A112.6.3 - 2001: Section 7.12 Heel Resistant Strainers and Grates
- Bicycle Tire Penetration Resistant to AS3996-2006

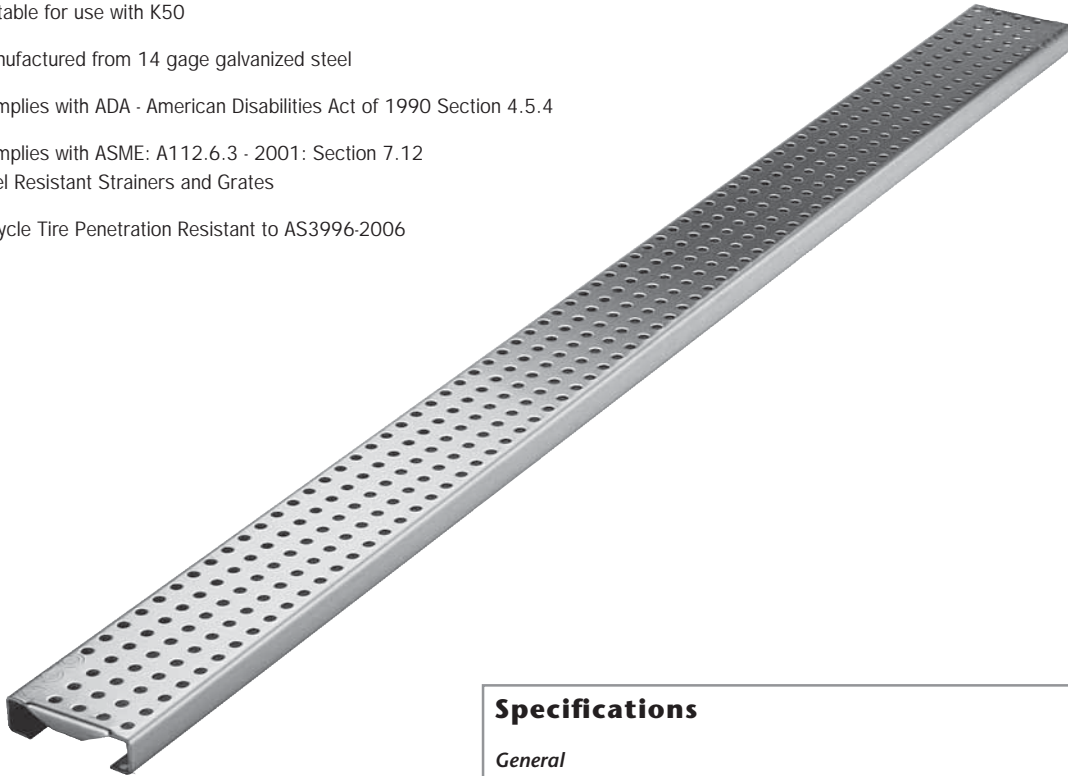

Specifications

General

The surface drainage system shall be ACO Drain MiniKlassik K50 channels complete with ACO MiniKlassik galvanized steel perforated grate as manufactured by ACO Polymer Products, Inc. or similar approved.

Materials

The covers shall be manufactured from galvanized steel and have **minimum** properties as follows:

- **Independently certified to meet Load Class A to EN 1433 - 3,500 lbs - 91 psi**
- **14 gage galvanized steel**
- **Intake area of 14.5 sq. in. (93.5 cm²) per meter grate**

The overall width of 2.95" (75mm) and overall length of 39.37" (1000mm). Perforations measure 0.23" (5.84mm) in diameter.

Installation

The trench drain system and grates shall be installed in accordance with the manufacturer's installation instructions and recommendations.

ACO Specification Information


ACO DRAIN

MiniKlassik galvanized steel perforated grate



ACO Specification Information

Plan view

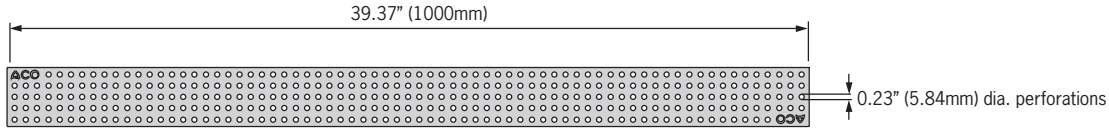

Side elevation



Description	Part No.	Length inches (mm)	Width inches (mm)	Weight lbs.
MiniKlassik Galvanized steel perforated grate	94699	39.37 (1000)	2.95 (75)	4.0

ACO Polymer Products, Inc.

Northeast Sales Office

P.O. Box 245
Chardon, OH 44024
Tel: (440) 285-7000
Toll free: (800) 543-4764
Fax: (440) 285-7005

West Sales Office

P.O. Box 12067
Casa Grande, AZ 85130
Tel: (520) 421-9988
Toll Free: (888) 490-9552
Fax: (520) 421-9899

Southeast Sales Office

4211 Pleasant Road
Fort Mill, SC 29708
Toll free: (800) 543-4764
Fax: (803) 802-1063

Follow us on



Electronic Contact:

info@ACODrain.us
www.ACODrain.us



© February 12, 2013 ACO Polymer Products, Inc. This information is believed to be accurate but it is not guaranteed to be so. We cannot assume liability for results that buyer obtains with our product since conditions of use are beyond the control of the company. It is the customer's responsibility to evaluate suitability and safety of product for his own use. ACO Polymer Products Inc. reserves the right to change the product and specifications without notice. Reorder# DL163